


NOTES:

- 1.) USE OF TYPE A-2 AND A-3 PIPE BEDDING TO BE DETERMINED IN THE FIELD BY THE ENGINEER.
- 2.) 10" MAX. FOR PIPE DIAMETER LESS THAN 24"; 12" MAX. FOR PIPE 24" DIAMETER AND LESS THAN 42"; 24" MAX. FOR PIPE DIAMETER 42" AND OVER.
- 3.) 4" MAX. FOR PIPE 16" DIAMETER & LESS; 6" MAX. FOR PIPE 18" TO 36" DIAMETER; AND 9" MAX FOR PIPE 42" DIAMETER AND LARGER.
- 4.) INSTALLATION SHALL BE IN ACCORDANCE WITH THE MANUFACTURER'S SPECIFICATIONS.

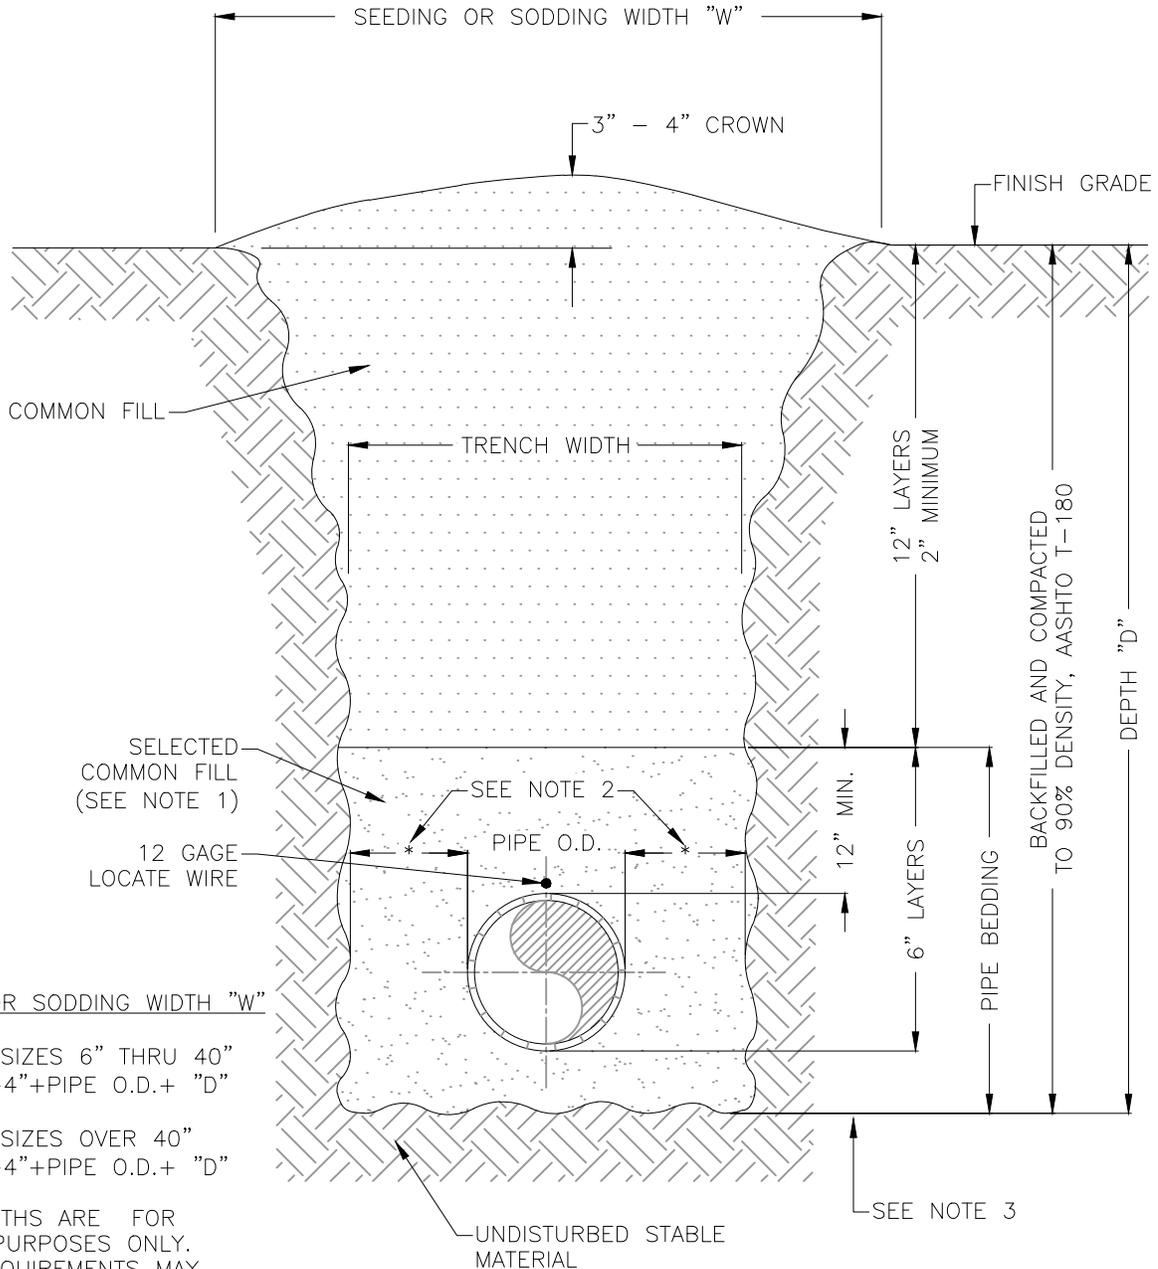

SEEDING OR SODDING WIDTH "W"

FOR PIPE SIZES 6" THRU 40"
"W" = 2'-4" + PIPE O.D. + "D"

FOR PIPE SIZES OVER 40"
"W" = 4'-4" + PIPE O.D. + "D"

THESE WIDTHS ARE FOR
PAYMENT PURPOSES ONLY.
SAFETY REQUIREMENTS MAY
DICTATE INCREASED WIDTHS.

CITY OF P.C.B.
UTILITIES DEPARTMENT

TRENCH DETAIL
UNIMPROVED SURFACE
TYPE A-1 PIPE BEDDING

M-22

REV.	DATE
1	MAR '12

.....
DATE OF APPROVAL