


PLAN

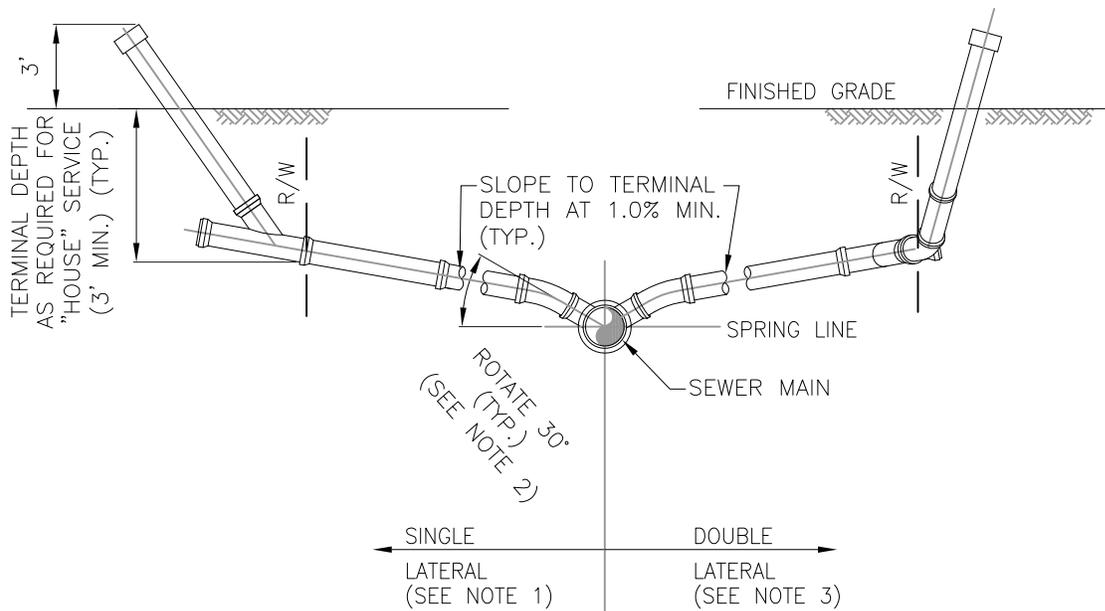

PROFILE

NOTES:

- 1.) LOCATE SINGLE LATERAL AS NEAR TO CENTER OF LOT AS POSSIBLE.
- 2.) INVERT OF SERVICE LATERAL SHALL NOT ENTER SEWER MAIN BELOW SPRING LINE.
- 3.) DOUBLE SERVICE LATERALS ONLY PERMITTED ON TAPS TO EXISTING GRAVITY MAINS WHERE EXISTING ROAD PAVEMENT MUST BE CUT.
- 4.) ALL PIPE FITTINGS SHALL BE PVC ASTM 3034 SDR35, GREEN IN COLOR.

CITY OF P.C.B.
UTILITIES DEPARTMENT

SERVICE LATERAL
DETAIL

S-5

REV.	DATE
1	MAR '12

.....
DATE OF APPROVAL